
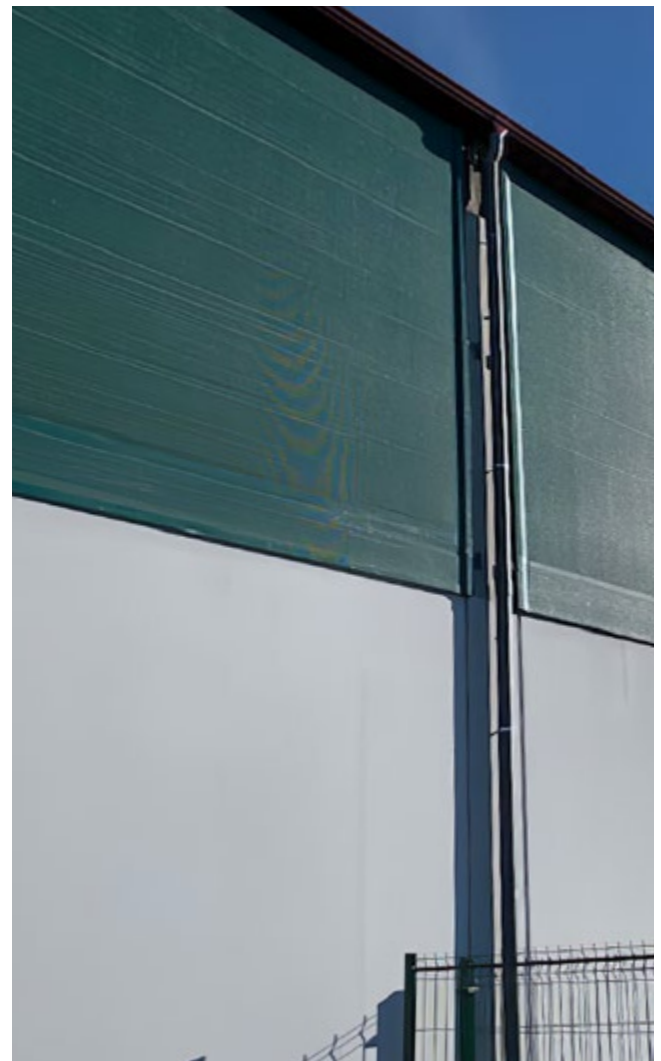


Colores • Colors • Couleurs • Farben / Largo • Width • Laise • Breite: ★300 cm

Muestra • Sample

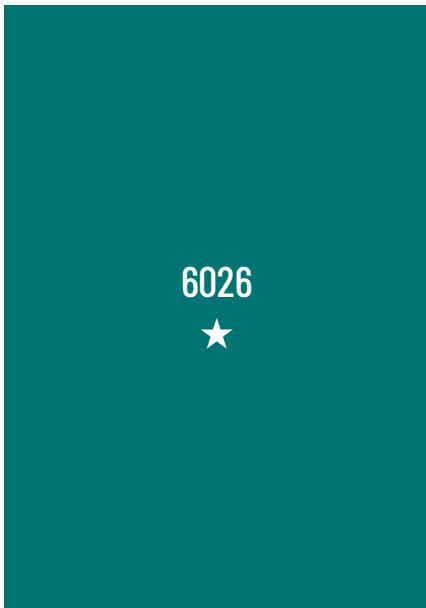

## SERVICIOS

- Corte de piezas
- Metreado
- Colores personalizados
- Libre de aftalatos
- Anchos personalizados

## SERVICES

- Roll slitting
- Metered rolls
- Customized colours
- Phtalate free
- Customized widths





## SERVICES








- Découpe de pièces
- Métrage
- Couleurs personnalisées
- Sans aftalates
- Découpe de pièces

## DIENSTLEISTUNGEN

- Zurechtschneiden von Stücken
- Meterware
- Farbe nach Kundenwunsch
- Phthalatfrei
- Kundenspezifische Breiten

## Características técnicas • Technical features • Caractéristiques techniques • Technische Daten

<b>Material base</b> • Base material Matériel de base • Trägergewebe	 100% PES
<b>Hilos</b> • Yarn count Fil • Garn	 1100 dtex
<b>Tipo de recubrimiento</b> • Type of coating Type d'enduction • Beschichtungsart	 PVC
<b>Acabado</b> • Finish Finition • Endausrüstung	 Rejilla • Mesh • Grille • Nets

Especificación • Specification Spécification • Spezifikation		Unidades • Units Unités • Einheiten	Método • Test Method Méthodes • Methode	Nominal • Target Nominal • Wert	
	<b>Gramaje</b> • Total weight Poids Total • Flächengewicht	g/m <sup>2</sup>	EN ISO 2286-2	600	
	<b>Resistencia Tracción</b> • Tensile strength Résistance Rupture • Reißfestigkeit	<b>URDIMBRE</b> • WARP CHÂÎNE • KETTE	daN/5cm	EN-ISO-1421	240
		<b>TRAMA</b> • WEFT TRAME • SCHUSS	daN/5cm	EN-ISO-1421	230
	<b>Resistencia Desgarre</b> • Tear strength Résistance Déchirure • Weiterreißfestigkeit	<b>URDIMBRE</b> • WARP CHÂÎNE • KETTE	daN	DIN-53363	50
		<b>TRAMA</b> • WEFT TRAME • SCHUSS	daN	DIN-53363	40
	<b>Adherencia 23°C</b> • Adhesion 23°C Adhérence 23°C • Haftung 23°C	daN/5cm	EN ISO 2411	4	
	<b>Temperaturas máximas</b> • Temperature resistance Températures extrêmes d'utilisation • Temperaturbeständigkeit	°C	EN 1876	-30/+70	
	<b>Ancho</b> • Width Laise • Breite	cm	EN ISO 2286-1	300	
	<b>Espesor</b> • Thickness Grosueur • Dicke	mm	EN ISO 2286-3	0,94	



La información facilitada corresponde a valores promedio de un producto recién fabricado con un rango de tolerancia de +/-10 %, se facilita como indicación y guía solamente, sin ninguna vinculación jurídica. Los valores proporcionados se refieren al estado original de la mercancía enviada antes del procesamiento o elaboración por parte del cliente. Por razones técnicas puede haber ligeras variaciones durante la producción, así como pequeñas alteraciones del color, las referencias al RAL son solo indicativas. El cliente como propietario del diseño debe comprobar la aptitud y compatibilidad del producto para el uso previsto antes de proceder a su procesamiento o elaboración.

The information provided corresponds to average values of a newly manufactured product with a tolerance range of +/- 10% which is provided as an indication and guidance only, without any legal binding. The values provided refer to the original status of the goods sent before processing or handling by the customer. For technical reasons there may be slight variations during production, as well as slight color alterations, the RAL references are only indicative. The customer as owner of the design must check the aptitude and compatibility of the product for the intended use before proceeding with its processing or elaboration.



ACREDITADO POR ENAC

# INDUSTRIAL **SEDÓ**

*Desde 1889*



+34 977 65 50 07

info@industrialsedo.com

www.industrialsedo.com

**Industrial Sedó, S.L.**

Camí Mas Llagostera S/N

43762 La Riera de Gaià

(Tarragona) Spain

# www.industrialsedo.com



ACREDITADO POR ENAC